

SCHEIBER SA

ISO 9001

BELLEVUE - 85120 SAINT PIERRE DU CHEMIN - FRANCE

E-mail : sav@scheiber.fr


Tél. : 02 51 51 74 48

L'OFFRE GLOBALE EN EQUIPEMENTS ELECTRIQUES ET ELECTRONIQUES

PANEL .36-09306-0

Services Techniques
Edition 08-90

FACADE PILOTE Ref 09 306 0

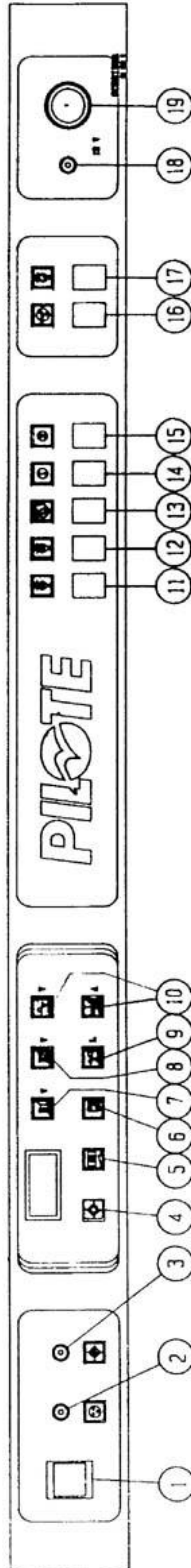

Switch 2 Positions (Socket 230 and Fridge)

Circuit Breakers 230V 16A (Socket)

Circuit Breakers 230V 16A (Fridge)

Light indicating running of the fridge in 12V - of Batteries

Light indicating parallel connection of waste water

Indicator manual level of waste water

Switch test for battery 1

Switch test for battery 2

Test for level front water (display in view)

unconnected

light A

light B

Pump

Auxiliary 1

Auxiliary 2

Hood exhaust

light of the hood


12V socket protection.

socket 12V 8 A Data


SCHEIBER SA
St Pierre du Chemin
85120 La CHATAIGNERAIE
Tel. 51 51 73 21

II - Connections:

Fils ~~Red~~
2 x 2.5 mm²



+ Batterie 2




- 1 - 2.5 mm²
- 2 - 2.5 mm²
- 3 - 2.5 mm²
- 4 - 2.5 mm²
- 5 - 2.5 mm²
- 6 - 2.5 mm²
- 7 - 0.75 mm²
- 8 - 0.75 mm²

Grey Pump 15A
Light B 10A (Orange)
Light A 10A (Red)
- Battery (Blue)
Auxiliary 1 10A (White)
Auxiliary 2 10A (Brown)
Fresh water (from the NPKA) (Grey)
+ Supplying from generator (Red)


See from
Side socket
connector
(side wires Pilot)

↑
Vue côté entrée fil
coupleur femelle
(Côté faisceau Pilote)
↓



- 1 - 0.75 mm
- 2 - 0.75 mm
- 3 - 0.75 mm
- 4 - 0.75 mm


Lighting 12V Fridge (Violet)
Waste water (Brown)
Indicator showing parallel connection of Batteries
(White)
+ Battery (Orange)



- 1 - ~~Blue~~
- 2 - ~~Brown~~
- 3 - ~~Jaune~~

Blue
Brown
yellow

| Input 230V.



- 2.5 mm² ~~Blue~~ Blue
- 2.5 mm² ~~Brown~~ Brown
- 1.5 mm² ~~Blue~~ Blue
- 1.5 mm² ~~Brown~~ Brown

| Socket 230V

| Fridge